# SASKATOON SEVEN DEPARTURE (VECTOR)



SL-1518 [USAF]

ATIS ★ 128.4 276.8
GND CON
121.9 275.8
SASKATOON TOWER ★
118.3 244.7
DEP CON
119.9 323.0
MF-118.3 244.7 5NM/
RADIO (when twr clsd)

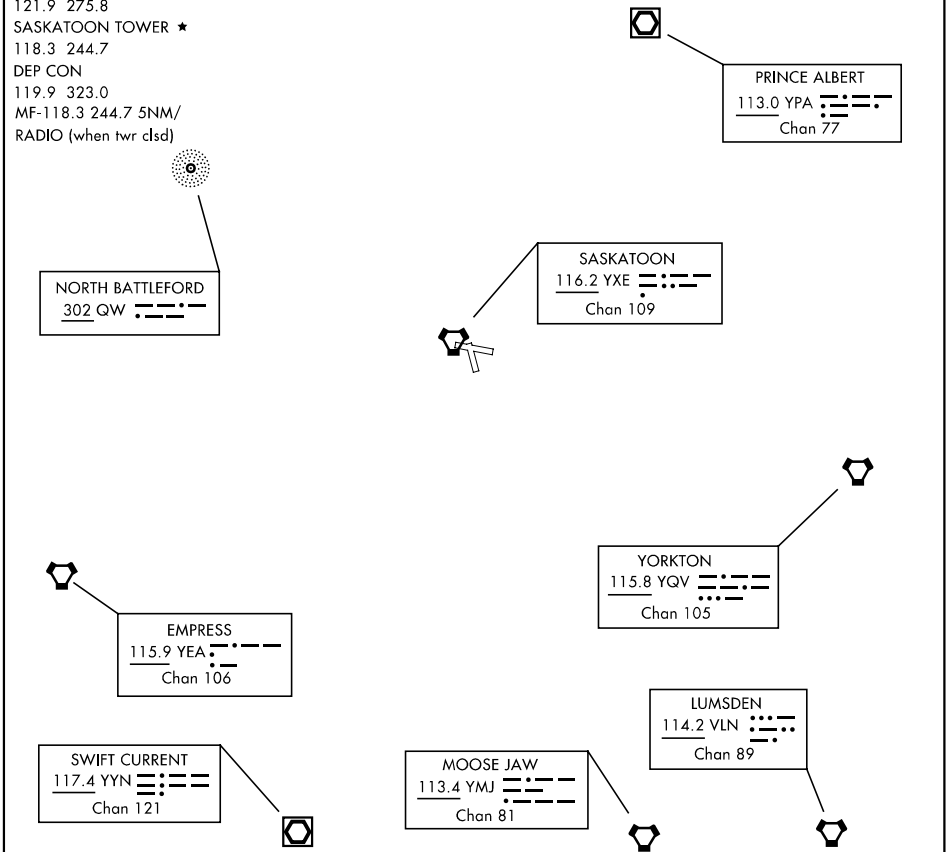


CHART NOT TO SCALE

## DEPARTURE ROUTE DESCRIPTION

ALL RUNWAYS: Climb rwy hdg or as assigned by ATC. Maintain 5000 or flight planned altitude, whichever is lower. Anticipate radar vectors to filed/assigned route. Expect clearance to flight planned altitude/flight level within 10 minutes after departure.

LOST COMMUNICATION: On recognition of a communications failure 10 minutes or less after take-off, and in IFR conditions:

1. Upon reaching last assigned altitude proceed directly on course.
2. Maintain last assigned altitude until 10 minutes after take-off.
3. Climb to flight planned altitude.

NOTE: If communications failure occurs more than 10 minutes after take-off, comply with the appropriate procedure for communication failure enroute.