OVALA 3A DEPARTURE

[USN] SL-2678 (SF)

CAPE TOWN INTL (FACT)
CAPE TOWN, SOUTH AFRICA

Rwy	Knots	60	120	180	240
01	V/V(fpm)	300	600	900	1200

ATC Climb Rate to 3000

ATIS ★115.7
GND CON
121.9
CAPE TOWN TOWER
118.1
CAPE TOWN APP CON
119.7

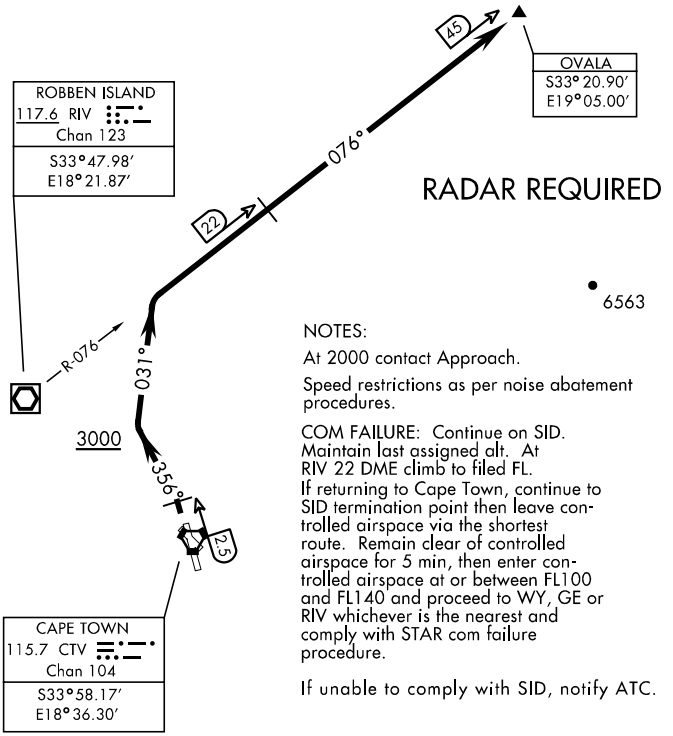

NOTES:

At 2000 contact Approach.

Speed restrictions as per noise abatement procedures.

COM FAILURE: Continue on SID. Maintain last assigned alt. At RIV 22 DME climb to filed FL.
If returning to Cape Town, continue to SID termination point then leave controlled airspace via the shortest route. Remain clear of controlled airspace for 5 min, then enter controlled airspace at or between FL100 and FL140 and proceed to WY, GE or RIV whichever is the nearest and comply with STAR com failure procedure.

If unable to comply with SID, notify ATC.



TA 7500

DEPARTURE ROUTE DESCRIPTION

OVALA 3A: TAKE-OFF RWY 01: Climb to 5000 (Max 200 KIAS until CTV 2.5 DME). At CTV 2.5 DME turn left heading 356°. After passing 3000′ turn right heading 031°. Join and fly RIV R-076 to OVALA (RIV R-076/45 DME), then set course per flight plan.

Effective 3 Oct 2002 - 31 Oct 2002