[USAF] SL-2932 (DND)

ATIS 124.2 302.5
CLNC DEL
119.0 384.5
GND CON
121.7 275.8
BAGOTVILLE TOWER
126.2 337.7
BAGOTVILLE TRML CON
127.2 227.6

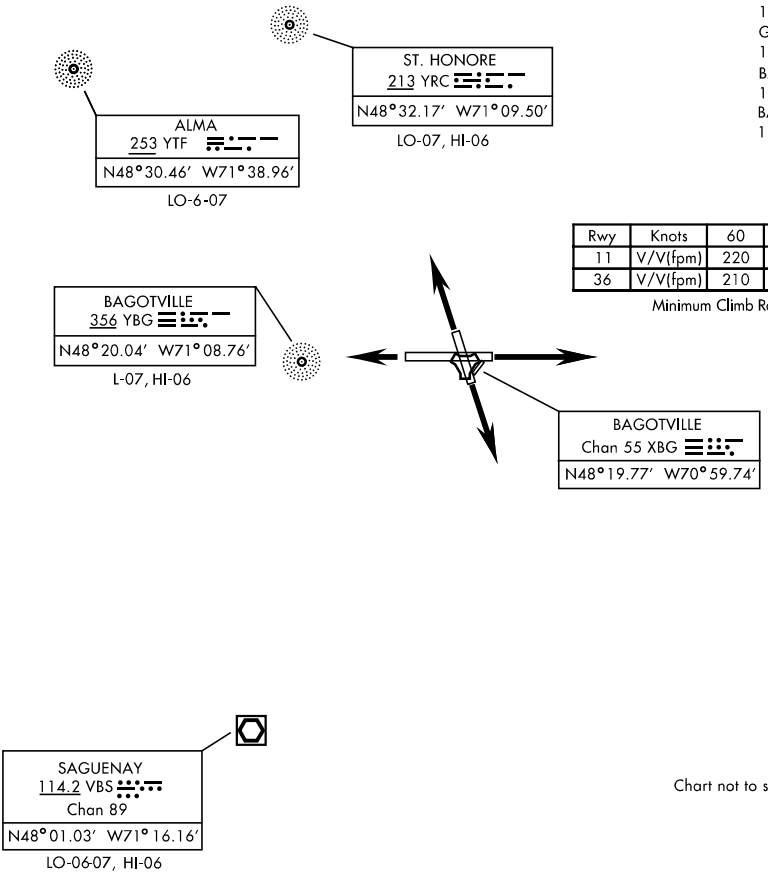

Rwy	Knots	60	120	180	240
11	V/V(fpm)	220	440	660	880
36	V/V(fpm)	210	420	630	840

Minimum Climb Rate to 4400

Chart not to scale

DEPARTURE ROUTE DESCRIPTION

ALL RWY: Climb rwy heading to 6000 MSL or assigned altitude. Expect radar vectors to filed/assigned route.

Effective 28 Nov 2002 - 26 Dec 2002