# VOR/DME-VOR-NDB RWY 23

[USA] AL-2420 (MZ)

MAPUTO APP CON
127.3
MAPUTO TOWER ★
118.1
GND CON
121.7

Alternate Procedures
(Subject to ATC approval)
***R-005 10 DME arc CW and
***R-095 10 DME arc CCW to the R-045 10 DME at 3000. Maintain 3000 for entry to holding or if on direct approach R-045 10 DME to FAF, descend to 1700.

From R-155 CW to R-335: Overhead to VMA VOR/DME at 3000. Fly outbound on R-045. Descending to 1700, then PT left at 1700. Start PT at VMA 3.0 DME or overheading the MO LOM.




ADF REQUIRED

MISSED APPROACH
Climb straight ahead to 3000 and follow ATC instructions.




ELEV 145

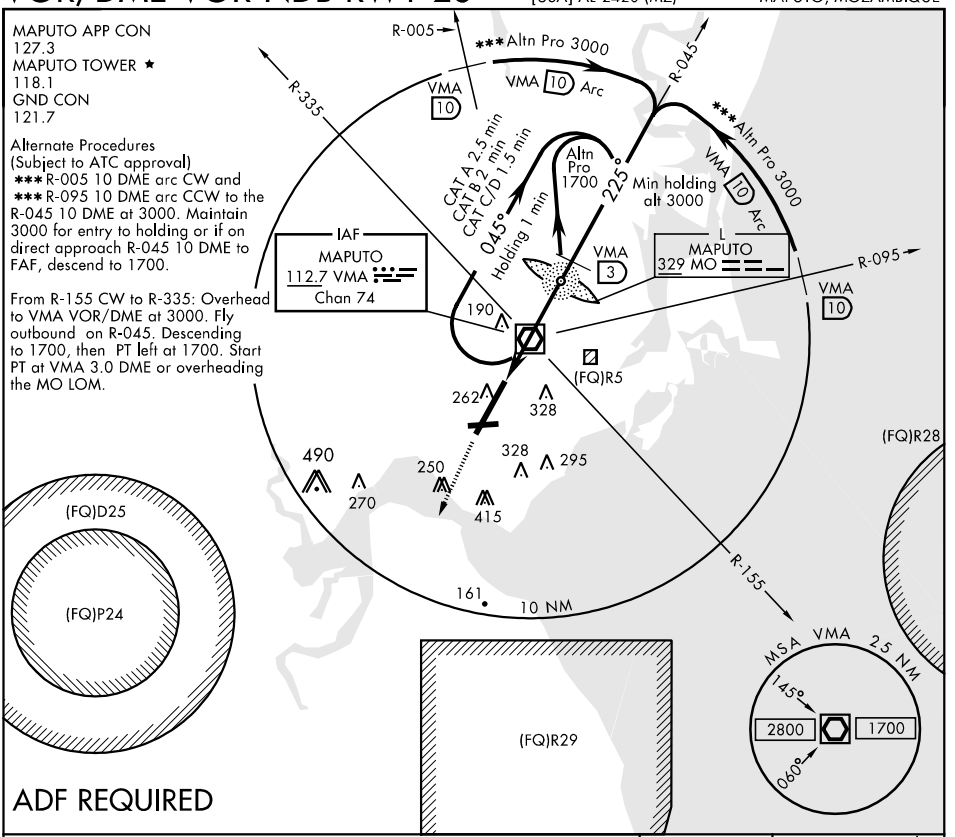


LIRL all Rwy

| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-23 * | 520-1200m 375 (400-1200m) | | | 520-1600m 375 (400-1600m) |
| CIRCLING ** | 640-1600m 495 (500-1600m) | 700-1600m 555 (600-1600m) | 800-2800m 655 (700-2800m) | 840-3600m 695 (700-3600m) |

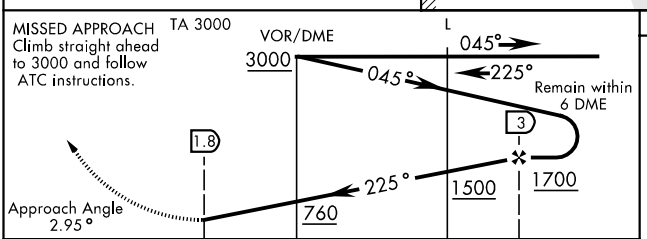T
*When ALS inop, increase vis 400m.
**Circling not authorized E of Rwy 05-23.

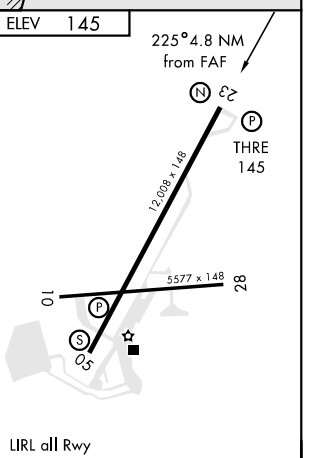

**Effective 28 Nov 2002 - 26 Dec 2002**