VOR/DME RWY 01

[USN] AL-2678 (SF)

CAPE TOWN INTL (FACT)
CAPE TOWN, SOUTH AFRICA

ATIS ★115.7
CAPE TOWN APP CON
119.7
CAPE TOWN TOWER
118.1
GND CON
121.9

Procedure turn approach applicable only within 30° of the outbound heading. Use phraseology "Request procedure turn approach".

Initial approach altitude 6500 or higher MSA.

Descend in the hold to 3000.

CAUTION: FNA crs intercepts RCL 1823′ inside thld.

IAF
CAPE TOWN
115.7 CTV
Chan 104

MSA CTV 25 NM
180°
7300
5100
360°

TA 7500

MISSED APPROACH
Ahead to CTV climbing to 6500. At CTV turn left on CTV R-346. At 6500 turn right to CTV and via CTV R-196 to CTV 5 DME.

Approach Angle 2.5°

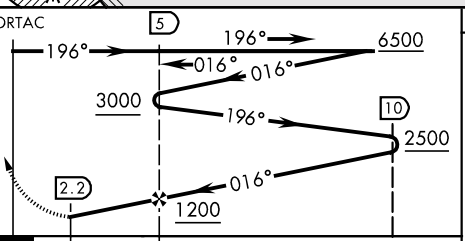

ELEV 151

HIRL Rwy 01-19
HIRL Rwy 16-34
REIL Rwy 16-34
TDZL/CL Rwy 01-19

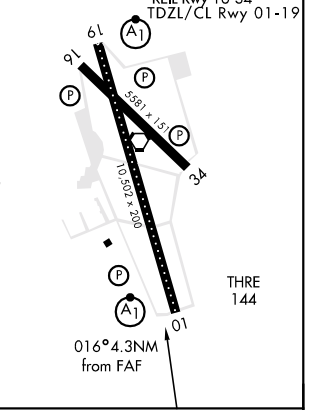

CATEGORY	A	B	C	D
S-01*	680-1200m 536 (600-1200m)		680-1600m 536(600-1600m)	680-2000m 536(600-2000m)
CIRCLING	NOT AUTHORIZED			

* When ALS inop, increase vis 800m.